

## 12 / 24 VAC ARM LIGHT FLASHER Specifications



### 12 / 24 VAC FLASHER

**GENERAL:** The flasher shall be moisture and corrosion resistant and shall be capable of dissipating heat sufficient for continuous duty.


**FLASH RATE:** The flasher shall have two alternately flashing circuits, and one steady burn circuit. Each flashing circuit shall flash .50 seconds on and .50 seconds off.

**INPUT VOLTAGE:** Standard input voltage shall be 120VAC. The transformer shall provide 12V or 24V for the flasher and the arm lights. The flasher shall operate properly for input voltages within 10% of nominal.

**OUTPUT VOLTAGE AND AMPERAGE:** The output circuits shall be rated at 10 amps at 12V or 24V each (10 amps total load). A voltage drop of up to .5 volts to the output terminals shall be acceptable.

**OVERLOAD PROTECTION:** Built-in, internal overload protection with auto-reset (no fuse required).

**TERMINALS:** Terminals shall be clearly labeled and shall be compression type screw terminals.

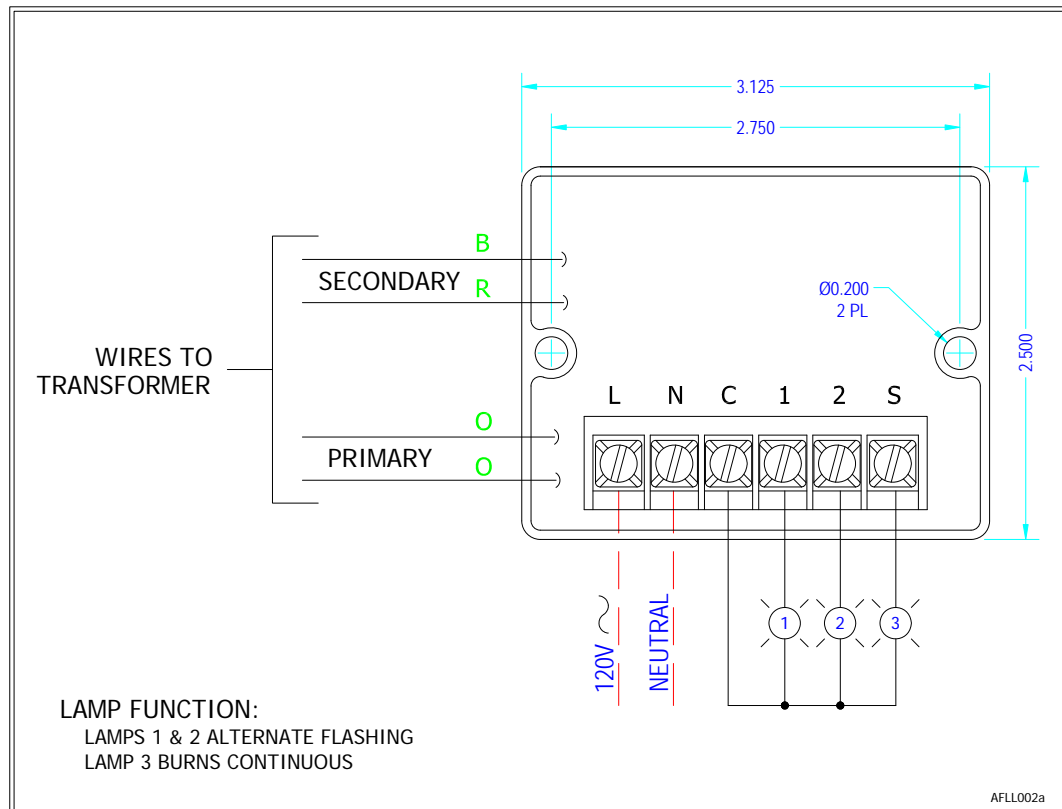

Revised 5/14